



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



DY Series 1-Piece Ball Valves

June 2021



ENGINEERING YOUR SUCCESS.

Contents

Page 3	Introduction
Page 3	Features
Page 3	Specifications
Page 4	Pressure vs. Temperature
Page 4	Dimensions & Materials List
Page 5	How to Order

Introduction

Parker's DY series 1-piece, stainless steel, low pressure ball valve offers quick, quarter turn shut off capability for chemical, petrochemical, oil & gas, pulp & paper, and instrumentation applications. The DY series ball valve is designed for most of the industrial pipe line. With its blow out resistant stem, standard locking lever handle and NPT, BSPT, BSPP end connections. The DY Series is an excellent, cost effective choice for applications ranging in size from 1/4" to 2", and provides total shut off capability for services up to 69 Bar (1000 PSI).

Features

- Ball valve bodies are machined from CF-8M stainless steel castings, equivalent of 316 stainless steel which is suited for corrosive environments.
- Highly inert PTFE seats and seals provide resistance to chemical corrosion.
- For chemical and industrial applications.
- Blow out proof stem design, 316 stainless ball and a special design handle enable increased turn and leverage for ease of opening and closing.
- Positive handle stops, with locking device.
- 100% factory tested.




Model Shown: 16F-DY16L-T-SS


Specifications

Working Pressure	69 Bar (1000 PSI) CWP
Temperature Ratings	-40 °C to 193°C (-40 °F to 380 °F)
Body Material	CF8M Stainless Steel, 316SS Cast Equivalent
Ball and Stem Material	316 Stainless Steel
End Connections	Female NPT / BSPT / BSPP
Port Size	1/4" to 2"

Pressure vs. Temperature

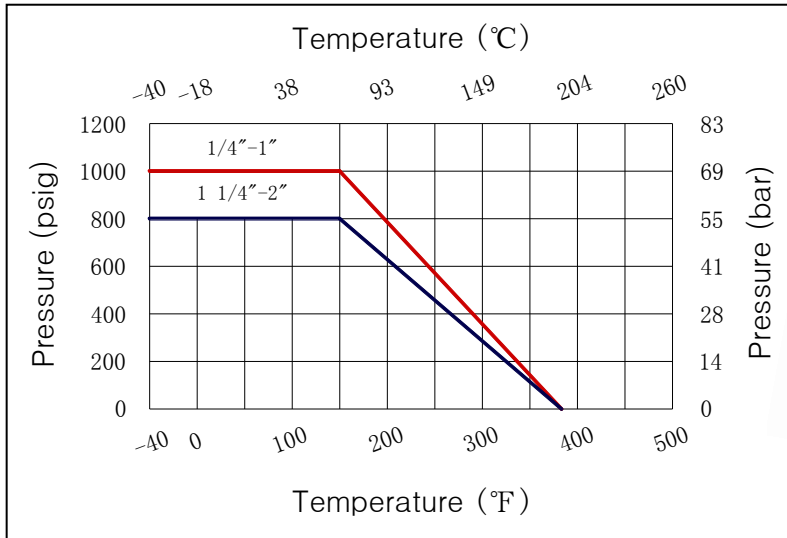

Dimensions & Materials List

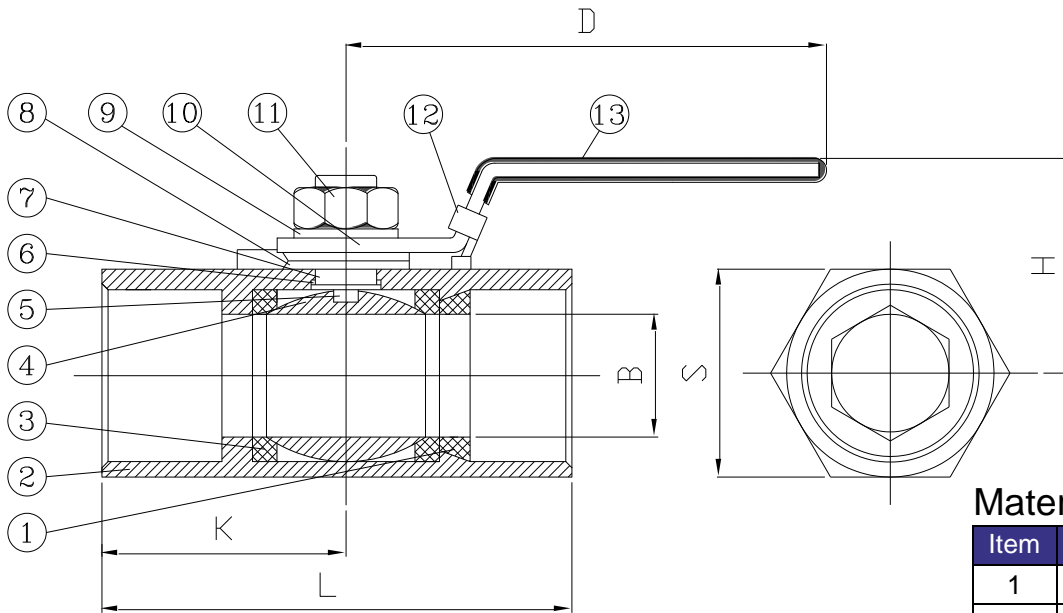

Materials List

Item	Part	Material
1	Insert	CF8M
2	Body	CF8M
3	Seat	PTFE
4	Ball	SS 316
5	Stem	SS 316
6	Thrust Washer	PTFE
7	Stem Packing	PTFE
8	Gland Washer	SS 304
9	Washer	SS 304
10	Handle	SS 304
11	Nut Stopper	SS 304
12	Locking Device	SS 304
13	Sleeve	Plastic

Dimensions (mm)

Part No.	Size	B	H	D	L	S	K	W(kg)
4F-DY4L-T-SS	1/4"	5	38	62.5	39	17	19	0.07
6F-DY6L-T-SS	3/8"	7	40	73	44	21	21	0.11
8F-DY8L-T-SS	1/2"	9.2	51	85	56.5	25	27.5	0.18
12F-DY12L-T-SS	3/4"	12.5	53	87	59	32	30	0.26
16F-DY16L-T-SS	1"	16.0	56	107	71	38	36	0.42
20F-DY20L-T-SS	1 1/4"	20	61	107	78	49	40	0.75
24F-DY24L-T-SS	1 1/2"	25	68	130	83	53	42.5	0.85
32F-DY32L-T-SS	2"	32	73	130	100	65	51	1.35

How to Order

The correct part number is easily derived from the following number sequence. The six product characteristics required are coded as shown below.

Example: 8F - DY8L - T - SS Describes a DY8L Two-Way Ball Valve with 1/2" female NPT end connections for inlet and outlet ports, PTFE stem packing & seats, and stainless steel construction.

8	F	—	DY8	L	—	T	—	SS
Port Size	Inlet / Outlet Ports		Valve Series	Valve Configuration		Stem Packing & Seat Material		Body Material
4	F - Female NPT		DY4	L - 2 Way		T - PTFE		SS – Stainless Steel
6	TF - Female BSPT		DY6					
8	PF - Female BSPP		DY8					
12			DY12					
16			DY16					
20			DY20					
24			DY24					
32			DY32					

WARNING

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs
Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000-99

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

21-6-B ING-EN-6P-DY

Parker Hannifin Instrumentation



ENGINEERING YOUR SUCCESS.