

Distribution Manifolds

For Process Instrumentation



ENGINEERING YOUR SUCCESS.

Hi-Pro Distribution Manifold

HPAHM Series

Parker's Hi-Pro distribution manifolds are designed for applications that use liquid or gas, low temperature steam and hydraulic actuation. The pressure rating of these manifolds is dictated by the inlet/outlet Flange Class or the thread connection.

These Hi-Pro distribution manifolds feature an ergonomic vinyl sleeve on the valve handle to provide positive grip and ensure ease of operation. Each nut has an innovative domed design, which prevents ingress of moisture and contamination of the thread, therefore preventing corrosion.

They feature a part-welded construction, with all welds carried out by coded welders, providing assurance of their robustness and performance. These manifolds are NDT (Non Destructive Testing) applied, giving the customer greater assurance.

Product Features

- Available with four support feet drilled for mounting for ease of installation.
- Nominal bore body manufactured from a wide thick gauge 316 Stainless Steel
- Domed nuts
- Ergonomic vinyl sleeve
- Coded welding and non-destructive testing (NDT) as standard - guaranteed full penetration welds
- Greater volume capacity

Applications

- Liquid, gas and steam distribution

Product Benefits

- Ease of installation
- Corrosion resistant, eliminated internal scaling
- Domed nuts lock handles into place and prevent dirt and corrosion affecting the threads
- Easy to grip and comfortable
- Reliable, durable and safe
- Supports fluctuations in air compressor supply

Markets

- Oil and gas
- Petrochemical
- Chemical

How to Order

The correct part number is easily derived from the following number sequence


Flanged Inlet Style

HPAHM	S	6	8	F	150	8	N
Series	Material	Number of Distribution Valve Outlets	Inlet Size (inch)	Inlet Connection	Flange Class	Drain Valve Outlet Size (inch)	Drain Valve Outlet Connection
HPAHM High Pressure Distribution Manifold	S Stainless Steel	Insert Number From 4-20*	8 1/2	F Raised Face T Ring Type	150 150 300 300	8 1/2	N Female NPT K BSPT R BSPP
			12 3/4			12 3/4	
			16 1			16 1	
			24 11/2			24 11/2	
			32 2			32 2	

Threaded Inlet Style

HPAHM	S	4	8	R	8	N
Series	Material	Number of Distribution Valve Outlets	Inlet Size (inch)	Inlet Connection	Drain Valve Outlet Size (inch)	Drain Valve Outlet Connection
HPAHM High Pressure Distribution Manifold	S Stainless Steel	Insert Number From 4-20*	8 1/2	N Female NPT K BSPT R BSPP	8 1/2	N Female NPT K BSPT R BSPP
			12 3/4		12 3/4	
			16 1		16 1	
			24 11/2		24 11/2	
			32 2		32 2	


* Max. 10 valves on each side. Even numbers only when specifying Both Sides configuration.

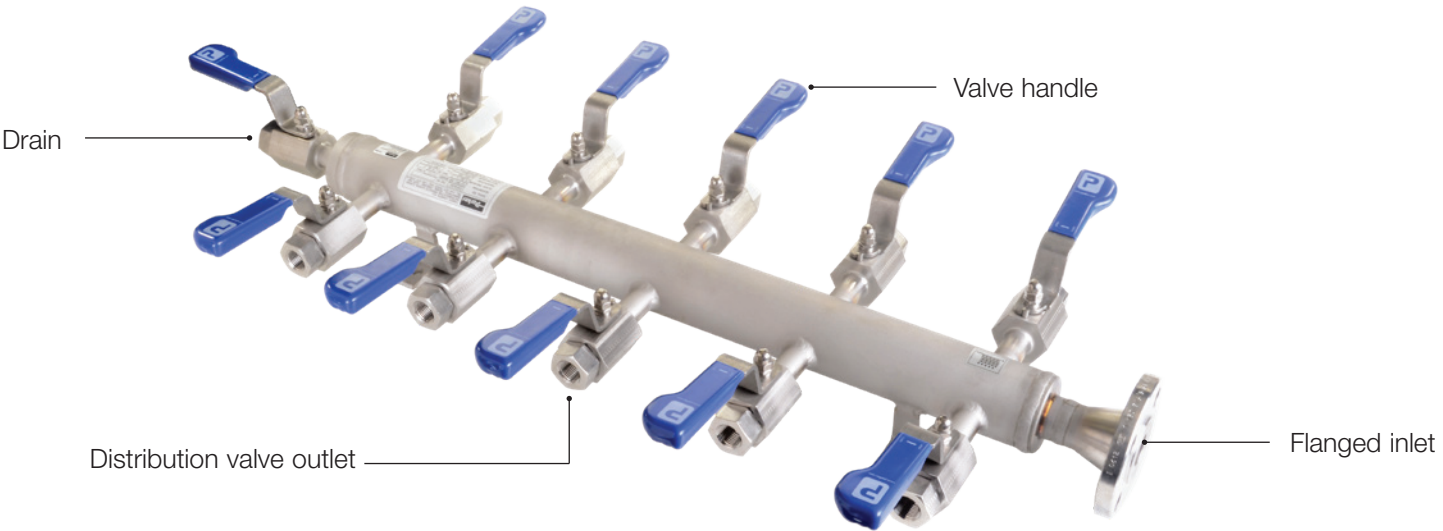

Hi-Pro distribution manifold with 10 distribution valve outlets.

Specifications

Central Pipe Body Material	Stainless Steel AISI 316
Ball Material	Stainless Steel 316
Stem Material	Stainless Steel 316
Seat Material	PTFE (standard), PEEK (optional)
Working Pressure	<ul style="list-style-type: none">• Threaded inlet style: Max. 2785 psi (192 bar)• Flanged inlet style: dependent on Flange Class
Temperature Rating	-54 °C to 180 °C (PTFE seat) -54 °C to 200 °C (PEEK seat)

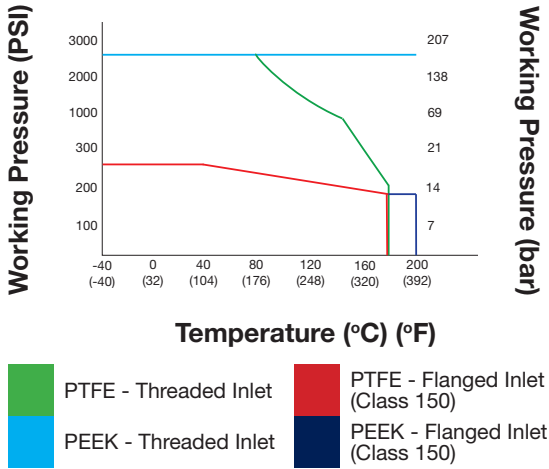

M10	A	BVO		
Distribution Valve Outlet Size	Distribution Valve Outlet Connection	Drain Options	Valve Configuration	High Temp. Option (PEEK seat)
4 1/4" 6 3/8" 8 1/2"	N Female NPT K BSPT R BSPP	BVO Ball Valve Outlet BPBVO Ball Valve Plugged Outlet BP Plugged Drain (Outlet) CP Plugged Distribution Outlets	- Both Sides R Right Side L Left Side	HT High Temp.
4 1/4" 6 3/8" 8 1/2" M6 6mm M10 10mm M12 12mm	A A-LOK			

8	N	BVO	
Distribution Valve Outlet Size	Distribution Valve Outlet Connection	Drain Options	Valve Configuration
4 1/4" 6 3/8" 8 1/2"	N Female NPT K BSPT R BSPP	BVO Ball Valve Outlet BPBVO Ball Valve Plugged Outlet BP Plugged Drain (Outlet) CP Plugged Distribution Outlets	- Both Sides R Right Side L Left Side
4 1/4" 6 3/8" 8 1/2" M6 6mm M10 10mm M12 12mm	A A-LOK		

Hi-Pro Modular Distribution Manifold

HPDM Series - up to 6,000 psi

Parker’s Hi-Pro modular distribution manifolds are the ideal choice when flexibility is required within a distribution manifold. They are approved to operate at pressures up to 6,000 PSI and are used extensively in the oil, gas, chemical and petrochemical industries to provide safety and performance.

These innovative Hi-Pro modular distribution manifolds can be easily arranged in a layout to suit a wide range of different applications to distribute liquid or gas. They use standard components, therefore making it more affordable for the customer.


The Hi-Pro modular distribution manifolds feature an ergonomic vinyl sleeve on the valve handle to provide positive grip and ensure ease of operation. Each nut is domed in shape, which prevents ingress of moisture and contamination of the thread, which could cause corrosion. This manifold is available in up to 20 valves (even numbers only - spare valves can be blanked off). Temperature range up to 232°C with PEEK seats.

Product Features

- Manufactured from AISI 316 stainless steel
- Ergonomic vinyl sleeve
- Domed nuts
- Standard wall mounting (also permits mounting to a 2” NB pipe stand)
- Offers flexibility of inlet, with the option to connect a single valve to the inlet to act as a primary isolate valve.

Product Benefits


- Corrosion resistant
- Easy and comfortable to grip
- Domed nuts lock handles into place and prevent dirt or corrosion affecting the threads
- Ease of assembly
- Flexibility in design

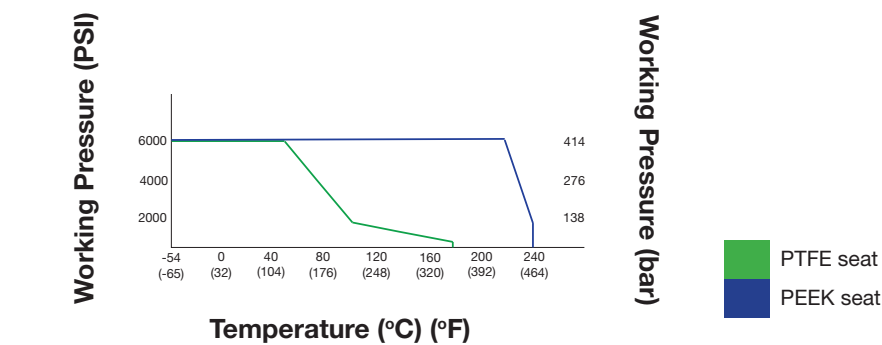

How to Order

The correct part number is easily derived from the following number sequence

HPDM	B	6	8	R	8	K
Series	Material	Number of Distribution Valve Outlets	Inlet Size (inch)	Inlet Connection	Drain Valve Outlet Size (inch)	Drain Valve Outlet Connection
HPDM Hi-Pro Modular Distribution Manifold	B Stainless Steel	Insert Number From 4-20	8 1/2	N Female NPT	8 1/2	N Female NPT
			12 3/4	K BSPT	12 3/4	K BSPT
			16 1	R BSPP	16 1	R BSPP

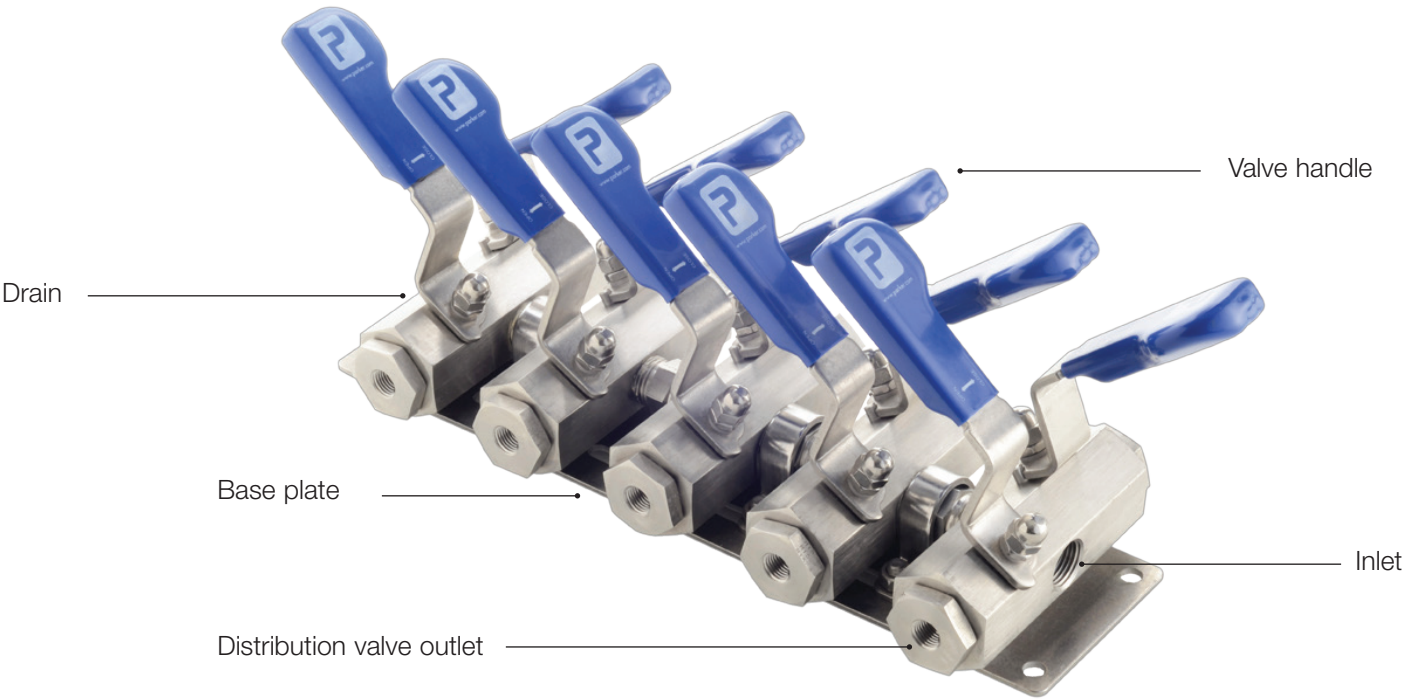

Hi-Pro modular distribution manifold with 10 distribution valve outlets.

Specifications

Central Pipe Body Material	Stainless Steel AISI 316
Ball Material	Stainless Steel 316
Stem Material	Stainless Steel 316
Seat Material	PTFE/PEEK
Maximum Working Pressure	6,000 psi (414 bar)
Temperature Rating	-54 °C to 232 °C

Markets

- Oil and gas
- Petrochemical
- Chemical

Applications

- Liquid and gas distribution


8	N	BP
Distribution Valve Outlet Size (inch)	Distribution Valve Outlet Connection	Drain Options
4 1/4	N Female NPT	BP Plugged Drain (Outlet)
6 3/8	K BSPT	CP Plugged Distribution Outlets
8 1/2	R BSPP	BCP All Outlets Plugged

Compact Distribution Manifold

HCDM Series - up to 6,000 psi

Parker's HCDM Series compact distribution manifolds offer a very compact design, making them suitable for space saving applications. They operate at pressures up to 6,000 PSI and feature all valves on the front face, for ease of accessibility.

These compact distribution manifolds utilise needle valves to enhance their compact design. They feature an anti-tamper key, which avoids unauthorised operator access. The HCDM Series compact distribution manifolds are suitable for use with air and steam applications in the oil and gas, petrochemical and chemical industries. Ideal for panel mounting, these compact distribution manifolds feature all the valves on the front face, for ease of accessibility.

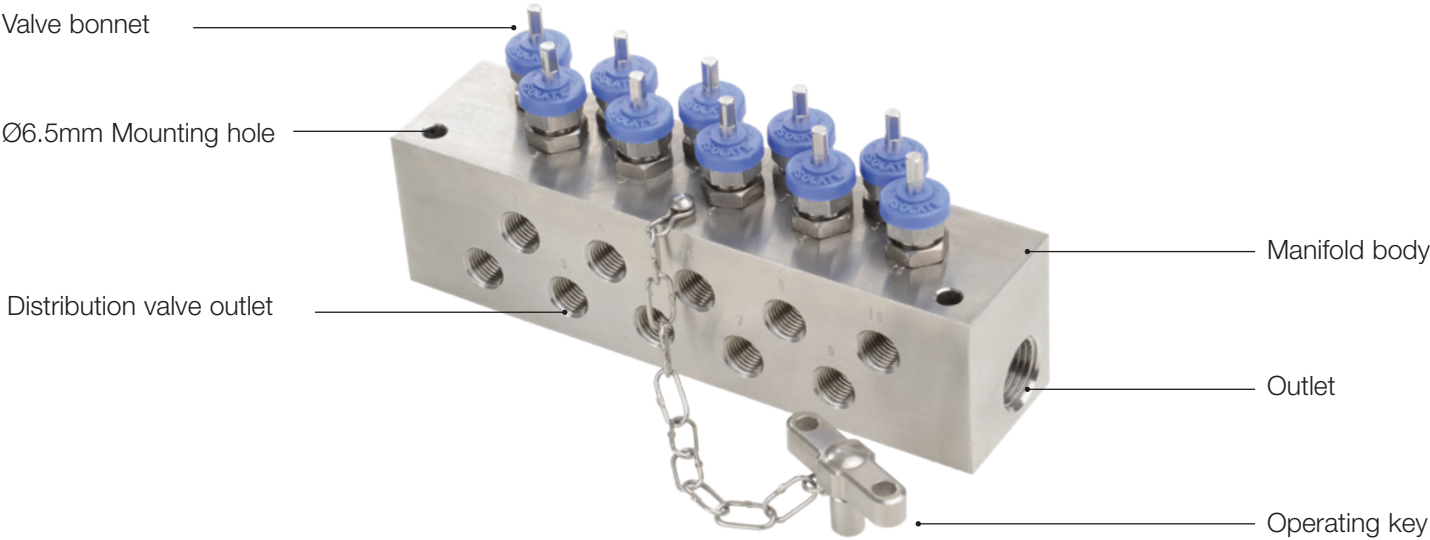

How to Order

The correct part number is easily derived from the following number sequence

HCDM	S	5	3	PK	K	AT	NC
Series	Material	Number of Distribution Valve Outlets	Packing Material	Tips	Connection	Anti Tamper	Compliance
HCDM Compact Distribution Manifold	S Stainless Steel	5 5	3 Graphite	9 Kel-F	K BSPT R BSPP	AT Anti-tamper bonnets and loose operating key	NC NACE
		10 10		PK PEEK			
				ST Stellite			
				RT Regulating			

Complementary Products



Fittings & Materials (Catalogue 4190-FMTG)

- A complete guide to Parker IPDE's fittings, tubing and materials. Including tubing charts, anti corrosion information together with a comprehensive guide to the complete range of fittings



Process to Instrumentation Valves

- TAMAP 2 star ball or needle valve class A or class B
- Single block and bleed or double block and bleed
- Available in the following materials 316, Duplex or alloy 625
- A-LOK ,CPI or BSPP connections
- Flange classes: 600 (covers 150, 300 and 600) class 2500 (covers 900, 1500 and 2500)



H Series Instrument Needle Valves (Catalogue 4190-VMS)

- Compact needle valves
- For applications up to 10,000 psi (690 bar)
- Available with integral A-LOK® or CPI™ connections, reducing leak paths and reducing installation costs
- Soft tipped optional seating available for gaseous applications
- Fire safe option



HBV Series Instrument Ball Valves (Catalogue 4190-HBV)

- Suitable for the most demanding applications in the oil, gas and process control industries
- Integral compression ends available, eliminating taper threads and thread sealants
- Two piece barstock design reduces body leakage paths
- Complies with ANSI/ASME B16.34 requirements where applicable
- NACE MR-01-75/ISO 15156 compliant materials available
- Fire safe option



Parker Grade Tube (Catalogue 4190-FMTG)

- Parker's Instrument tube fittings have been engineered and manufactured to consistently provide high levels of reliability, no systems integrity is complete without considering the critical link, tubing

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,

Dubai

Tel: +971 4 8127100

AT – Austria, St. Florian

Tel: +43 (0)7224 66201

AZ – Azerbaijan, Baku

Tel: +994 50 2233 458

BE/NL/LU – Benelux,

Hendrik Ido Ambacht

Tel: +31 (0)541 585 000

BY – Belarus, Minsk

Tel: +48 (0)22 573 24 00

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00

CZ – Czech Republic,

Prague

Tel: +420 284 083 111

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0

DK – Denmark, Ballerup

Tel: +45 43 56 04 00

ES – Spain, Madrid

Tel: +34 902 330 001

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25

GR – Greece

Tel: +30 69 44 52 78 25

HU – Hungary, Budaörs

Tel: +36 23 885 470

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370

IL – Israel

Tel: +39 02 45 19 21

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000

NO – Norway, Asker

Tel: +47 66 75 34 00

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00

PT – Portugal

Tel: +351 22 999 7360

RO – Romania, Bucharest

Tel: +40 21 252 1382

RU – Russia, Moscow

Tel: +7 495 645-2156

SE – Sweden, Borås

Tel: +46 (0)8 59 79 50 00

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650

TR – Turkey, Istanbul

Tel: +90 216 4997081

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos

Tel: +55 080 0727 5374

CL – Chile, Santiago

Tel: +56 22 303 9640

MX – Mexico, Toluca

Tel: +52 72 2275 4200

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 186 7000

TW – Taiwan, Taipei

Tel: +886 2 2298 8987

European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI,
FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU,
SE, SK, UK, ZA)

